SAFEWAY OMNIA



ENHANCED CHILD RESTRAINT SYSTEM

INSTALLATION INSTRUCTIONS

CHILD SIZE RANGE - 40 to 150cm

Rearward Facing : 40-105cm (Birth to approx. 4 years)
Forward Facing : 76-105cm (15 months to approx. 4 years)
i-Size Booster : 100-150cm (3 years to approx. 12 years)

Dear Parents

Congratulations on the purchase of your Child Safety Seat.
Safety, comfort and user-friendliness have at all times played an important role in the development of the Child Safety Seats.
This is an i-size child restraint system. It is approved by ECE R129, for use on i-size compatible vehicle seat as indicated by vehicle manufacturers in the vehicle users' manual.






ISO/R2
ISO/F2X

NOTICE

This is an i-Size Enhanced Child Restraint System. It is approved according to UN Regulation No. 129, for use in, i-Size compatible vehicle seating positions as indicated by vehicle manufacturers in the vehicle users' manual.
If in doubt, consult either the Enhanced Child Restraint System manufacturer or the retailer.

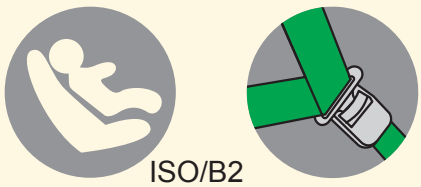

ISO/B2

NOTICE

This is a i-Size booster seat Enhanced Child Restraint System. It is approved according to UN Regulation No. 129, for use primarily in " i-Size seating positions" as indicated by vehicle manufacturers in the vehicle user's manual.
If in doubt, consult either the Enhanced Child Restraint System manufacturer or the retailer.

IMPORTANT

DO NOT USE FORWARD FACING BEFORE THE CHILD'S AGE EXCEEDS 15 months (Refer to instructions). Only suitable for use in the listed vehicles fitted with 3 point belt which is approved to ECE Regulation No.16.
Do not use the safety seat in seating positions where there is active airbag installed.

WARNING

1. Driving safety is the best way to protect children. Child safety seats can protect children effectively but they cannot completely eradicate the injuries caused by accidents at the wheel.
2. Make sure you use the correct group of safety seat with the right installation methods, as shown in the instruction manual for the child safety seats. Otherwise, there is a potential risk for the child to get injured.
3. The car seat shall be adjusted exclusively by an adult.
4. Do not let anyone use this product without having first read the instructions.
5. Each country has different safety laws and regulations for the transportation of children in cars. For this reason, contact local authorities for further information.
6. Make sure that no objects are positioned between the car seat and the vehicle's seat or between the car seat and car door.
7. Make sure that the vehicle's seats (foldable, tiltable or rotating) are well secured.
8. Make sure that the car seat is well installed before travelling.
9. The child safety seat should not be installed within the range of an active airbag, because in the event of an accident the airbag could harm the child.
10. Never use this child safety seat without the car seat cover.
11. The seat cover should not be replaced with any other than the one recommended by the manufacturer, because the cover constitutes an integral part of the restraint performance.
12. Any luggage or other objects that could cause injury in the event of a collision must be correctly secured.
13. The child restraint system is only suitable for use in the listed vehicles fitted with 3 point seat belts, approved to ECE Regulation No.16.
14. Never leave your child unattended in a car seat even for a short time.
15. HOT! Cover the child safety seat when left in direct sunlight. Parts of a child safety seat may become too hot for the child's skin. Always check surfaces before placing a child in the child seat.
16. Do not use a child safety seat that has been in an accident. An accident can cause damage to the child safety seat that you cannot see.
17. Please do not use the car seat products which have no certificate or been modified.
18. Please do not use accessories, spare parts or components which are not supplied and approved by the manufacturer and intended for the car seat.
19. Do not allow children to play with or adjust the child safety seat. Always check the tightness of the restraint and the harness before each use. Any straps holding the restraint to the vehicle should be tight, that any support-leg should be in contact with the vehicle floor, that any straps or impact shields restraining the child should be adjusted to the child's body, and that straps should not be twisted.

WARNING

20. WARNING! It is dangerous to make any alterations or additions to the device without the approval of the Type Approval Authority, and it is dangerous to not follow closely the installation instructions provided by the child restraint manufacturer.
21. The rigid items and plastic parts of the child safety seat shall be located and installed so that they are not liable to become trapped by a movable seat or in a door of the vehicle during everyday use of the vehicle
22. Make sure that any lap strap is worn low down, and that any impact shield is installed properly, so that the pelvis is firmly engaged.
23. If there is any interference between the buckle of the vehicle seat belt and the principal load contact points of the child safety seat, the seat should not be used. If you are in any doubt about this point, please contact the child safety seat manufacturer.
24. Please put the user manual into the car seat product, so that you can reference it every time when needed.
25. Please refer to the vehicle manufacturer's handbook when using the car seat.
27. The car seat should be replaced when it has been subject to violent stresses in an accident.
27. Keep the instructions for future reference.

NOTICE REGARDING REARWARD FACING RECLINE POSITIONS :

The Safety seat can be used in multiple recline positions when used rearward facing.

Although any recline position can be used for rearward facing, it is recommended to use the most reclined position (Position 5) for newborn babies.

Once your baby has reached 15 months, you can use any of the more upright positions.

Recommendations for recline position usage :

Birth to 15 months - Position 5
15 months to 2 years old - Position 4
2 to 4 years old - Positions 3 to 1

TABLE OF CONTENTS

KNOW YOUR CAR SEAT 5

SELECTION CRITERIA FOR BABY CAR SEAT 8

SAFETY SEAT FUNCTIONS

1. Rotation function 9
2. Recline adjustment 9
3. ISOFIX attachment 10
4. Support leg 10
5. 5-point harness installation 11
6. 5-point harness storage 13

HEIGHT: 40-105cm（≤18kg） 15


HEIGHT: 76-105cm（≤18kg） 16


HEIGHT: 100-150cm 17


REMOVING THE COVER 20

CLEANING AND MAINTENANCE 21

WARRANTY 22

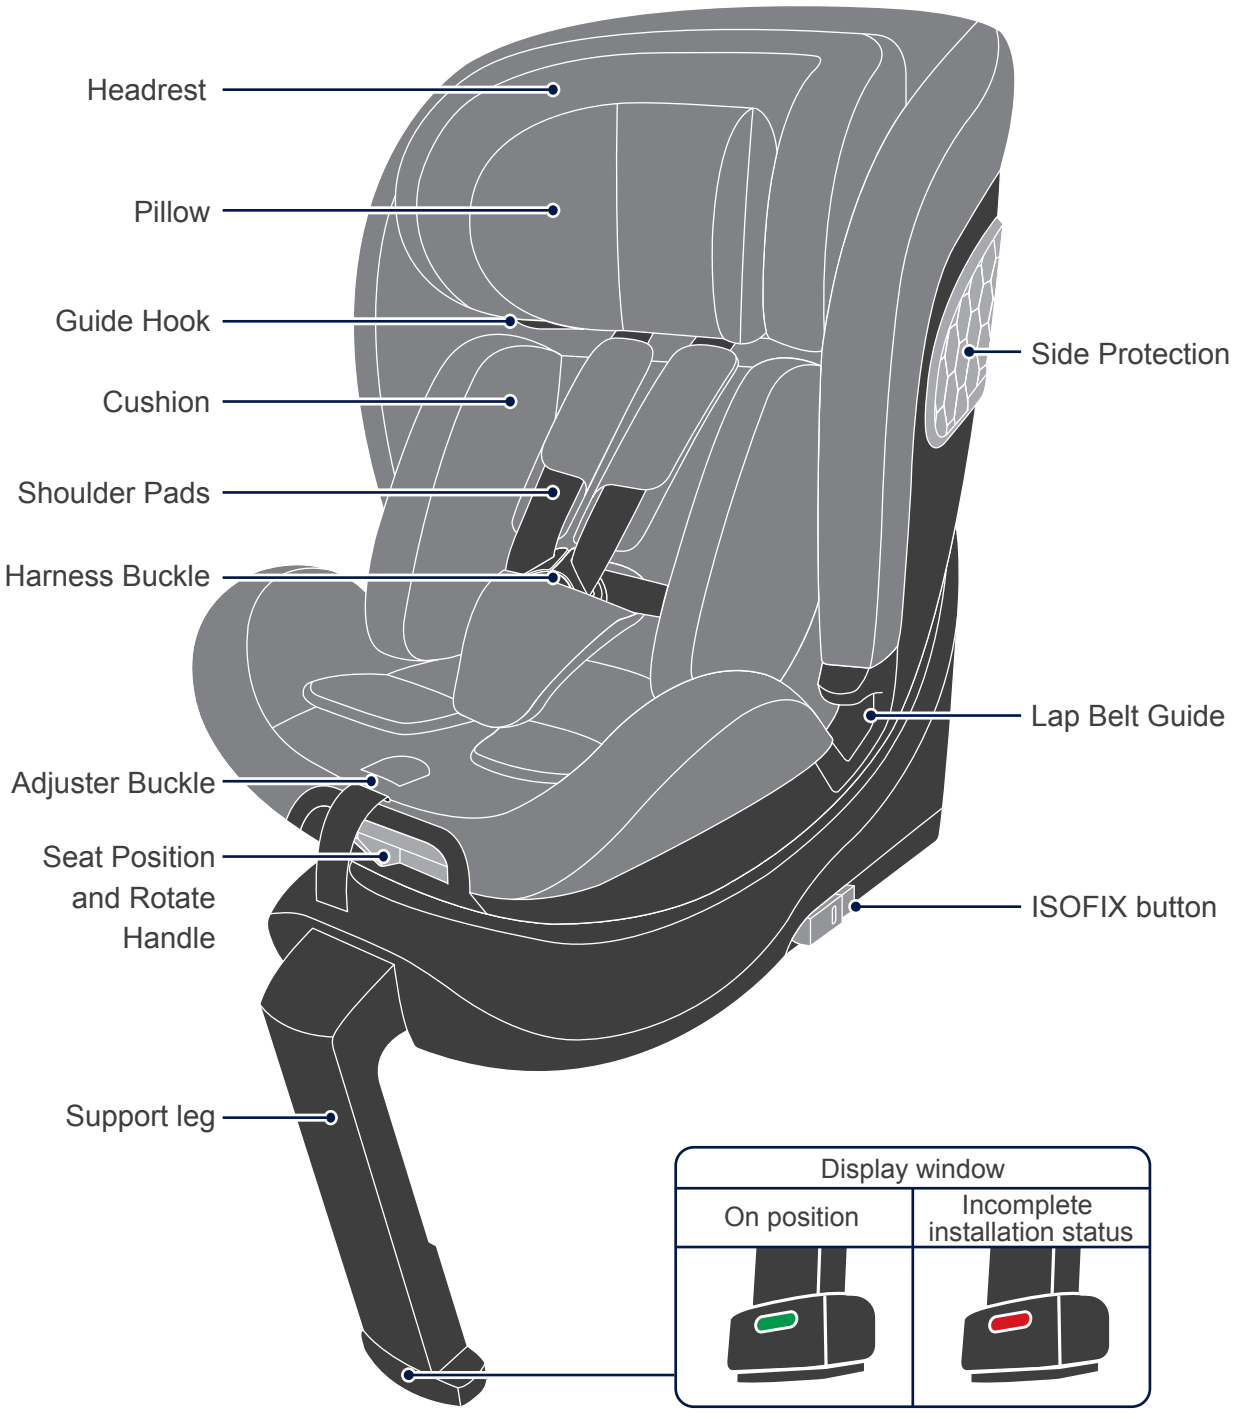
Headrest
Pillow
Guide Hook
Cushion
Shoulder Pads
Harness Buckle
Adjuster Buckle
Seat Position and Rotate Handle
Support leg
Side Protection
Lap Belt Guide
ISOFIX button
Display window
On position
Incomplete installation status

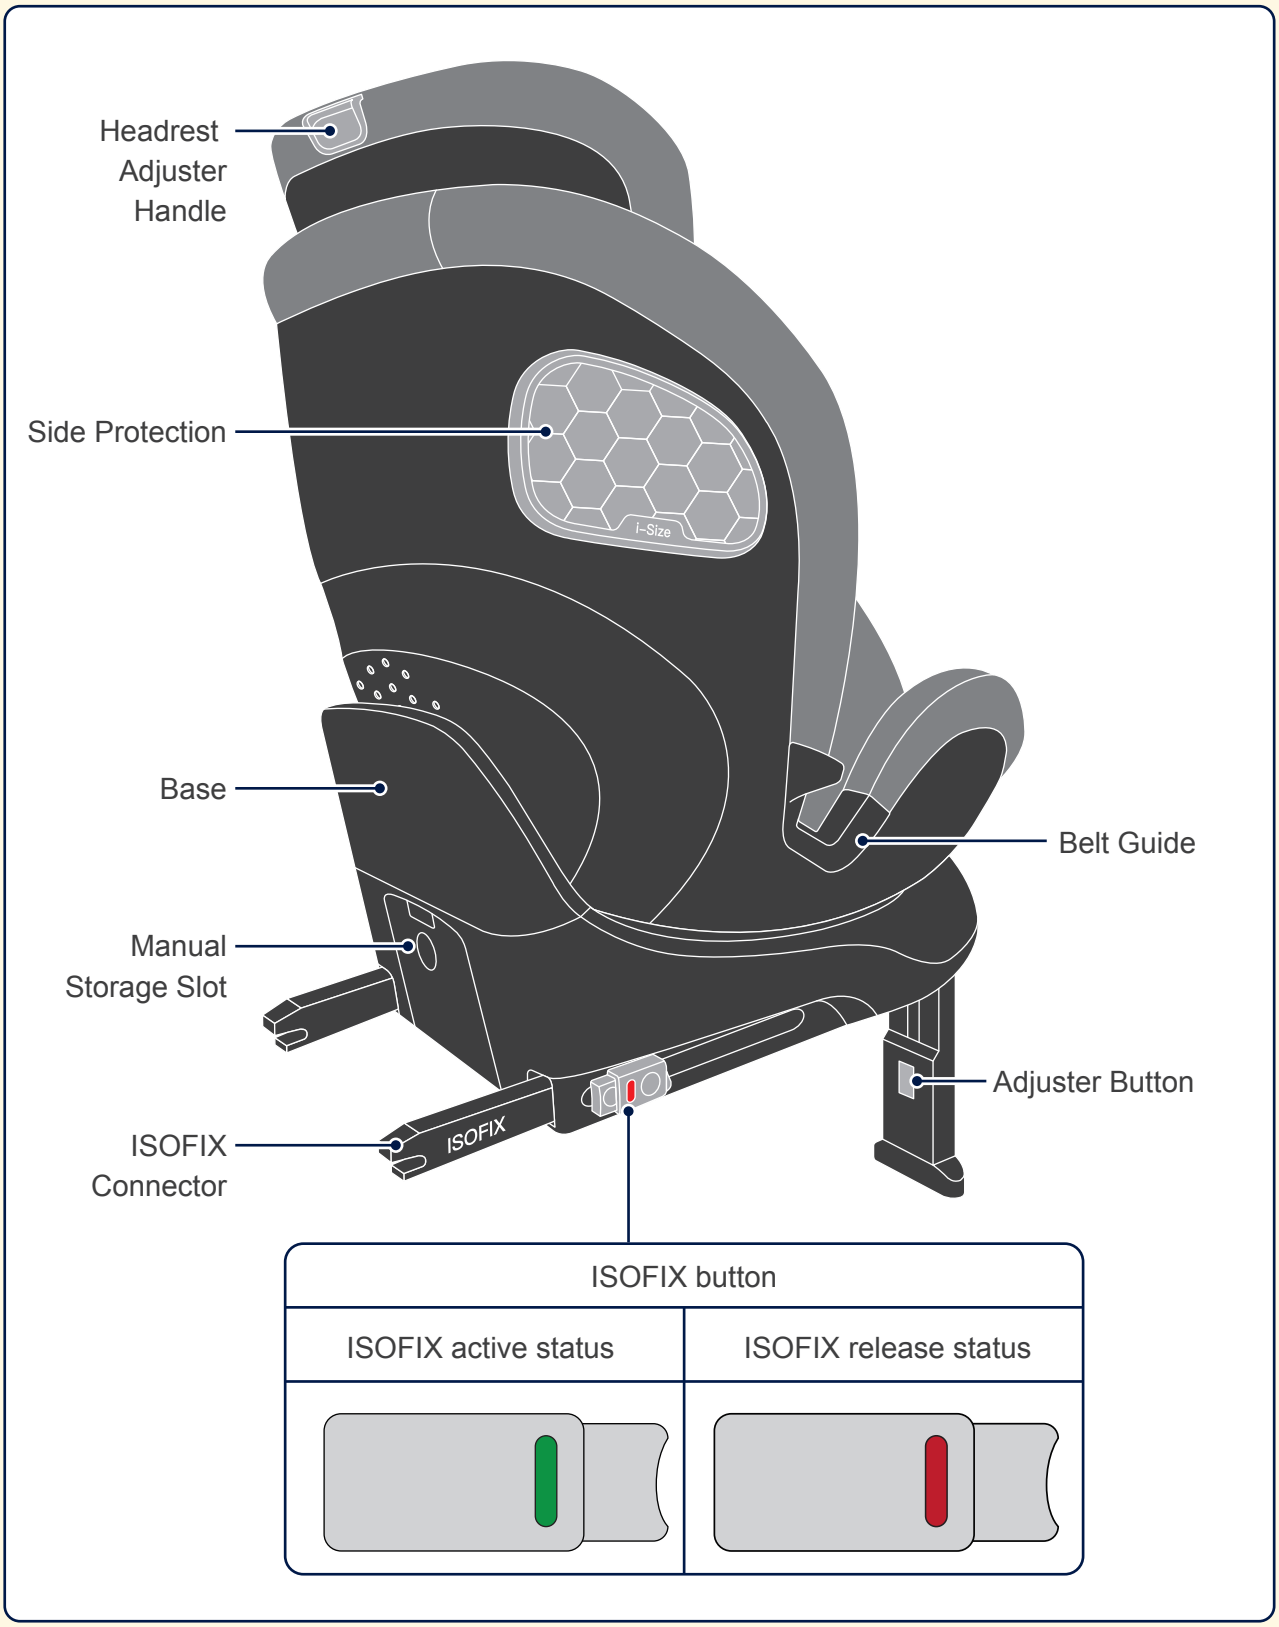
Headrest Adjuster Handle
Side Protection
i-Size
Base
Belt Guide
Manual Storage Slot
Adjuster Button
ISOFIX Connector
ISOFIX
ISOFIX button
ISOFIX active status
ISOFIX release status

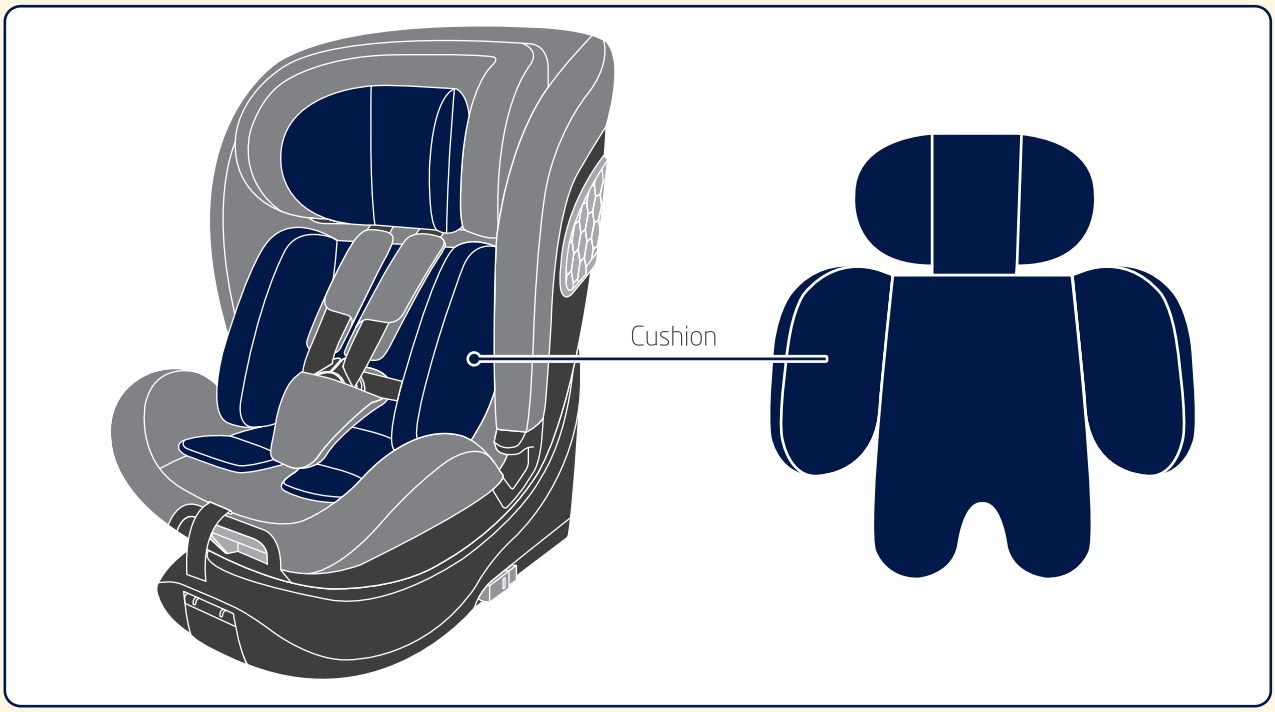

The infant cushion ensures your baby's safety during travel and improves the comfort of your child by it's ergonomic design. The infant cushion is removeable.


WARNING For your baby's safety, always use the headrest inlay, newborn cushion, and seat inlay exactly as instructed in the manual.

≤60cm	61-105cm	100-150cm
		


- The child car seat has been approved under regulation ECE R 129 for transport of children with a height range of 40-150 cm.
- Different installation methods must be used depending on the child's height. Refer to the standards below to determine the correct installation for each height range.
- Do not use any load bearing points that are not listed in the instructions and marked on the child safety seat.
- When installing the child safety seat in a rear-facing position, ensure it is not placed on a seat equipped with an active airbag.
- During car journeys the child safety seat must not be used in a side ways position and must not be rotated sideways.

Height	Age for reference	Children's restraining system	Installation method	Direction of installation	Requirement for vehicles
40-105 cm	0-4 years old	5-point harness	ISOFIX attachment + Support leg	Rearward Facing 	The vehicle equipped with ISOFIX anchroages.
76-105 cm	15 months - 4 years old	5-point harness	ISOFIX attachment + Support leg	Forward Facing 	The vehicle equipped with ISOFIX anchroages.
100-150 cm	4-12 years old	3-point seat belt	ISOFIX attachment + 3-point belt installation	Forward Facing 	The vehicle equipped with ISOFIX anchroages. Cannot be used if the vehicle seat is equipped with only a 2-point belt.
		3-point seat belt	3-point belt installation	Forward Facing 	The vehicle equipped with 3-point belt. Cannot be used if the vehicle seat is equipped with only 2-point belt.

? When baby's height is between 40 to 105cm, it should be with ISOFIX attachment anchorages.

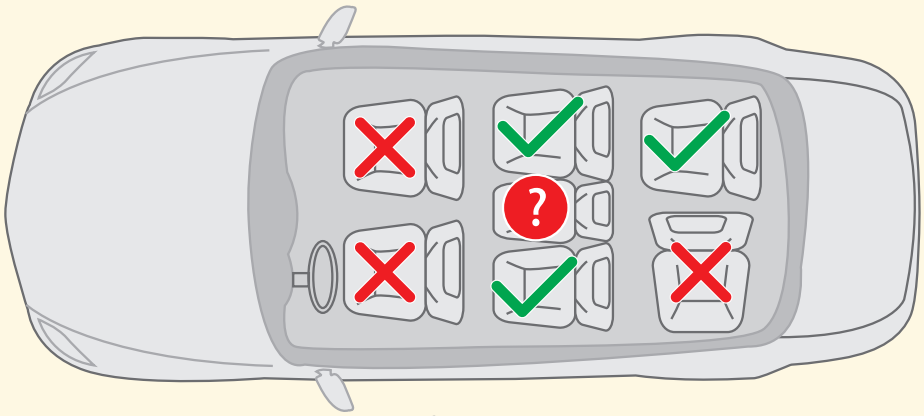

1. Rotation function

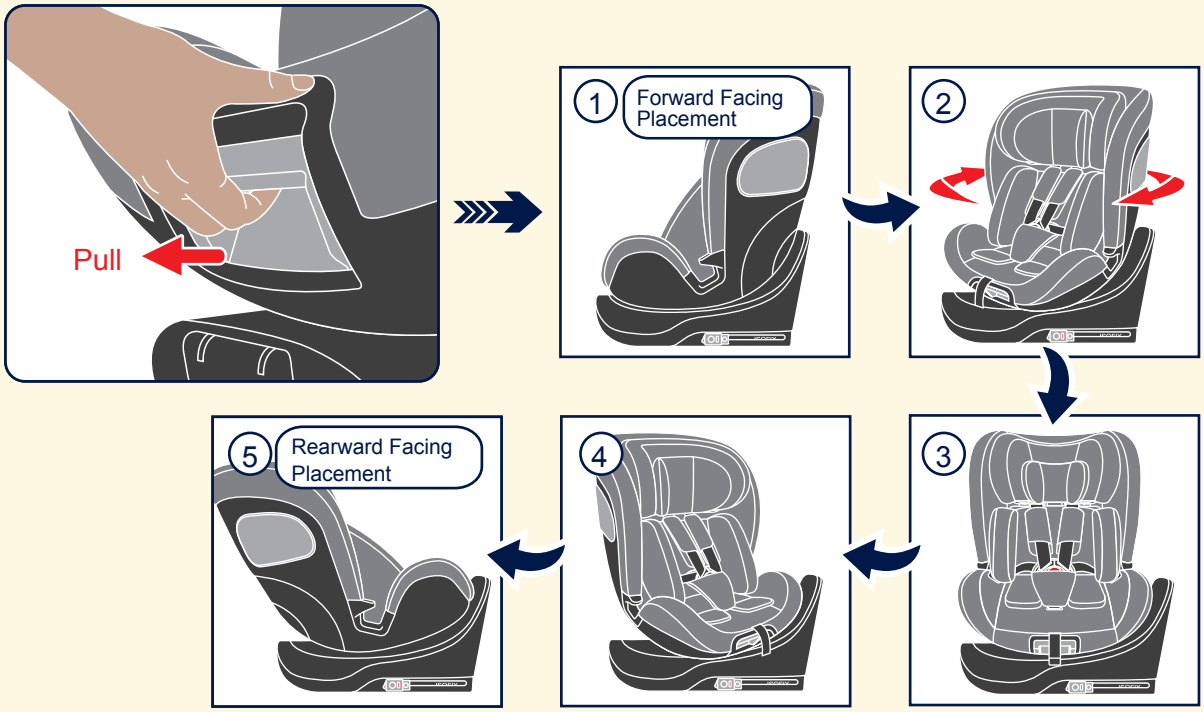

IMPORTANT

1. When driving, the safety seat cannot be used in sideways positions. It can only be used in the forward or rearward facing positions.
2. To facilitate rotation, please adjust the car seat to level 1 before rotation.


2. Recline adjustment




Attention


1. This handle can rotate the seat and adjust the recline position of the seat.
2. There are 5 recline positions for forward and rearward facing.

3. ISOFIX attachment

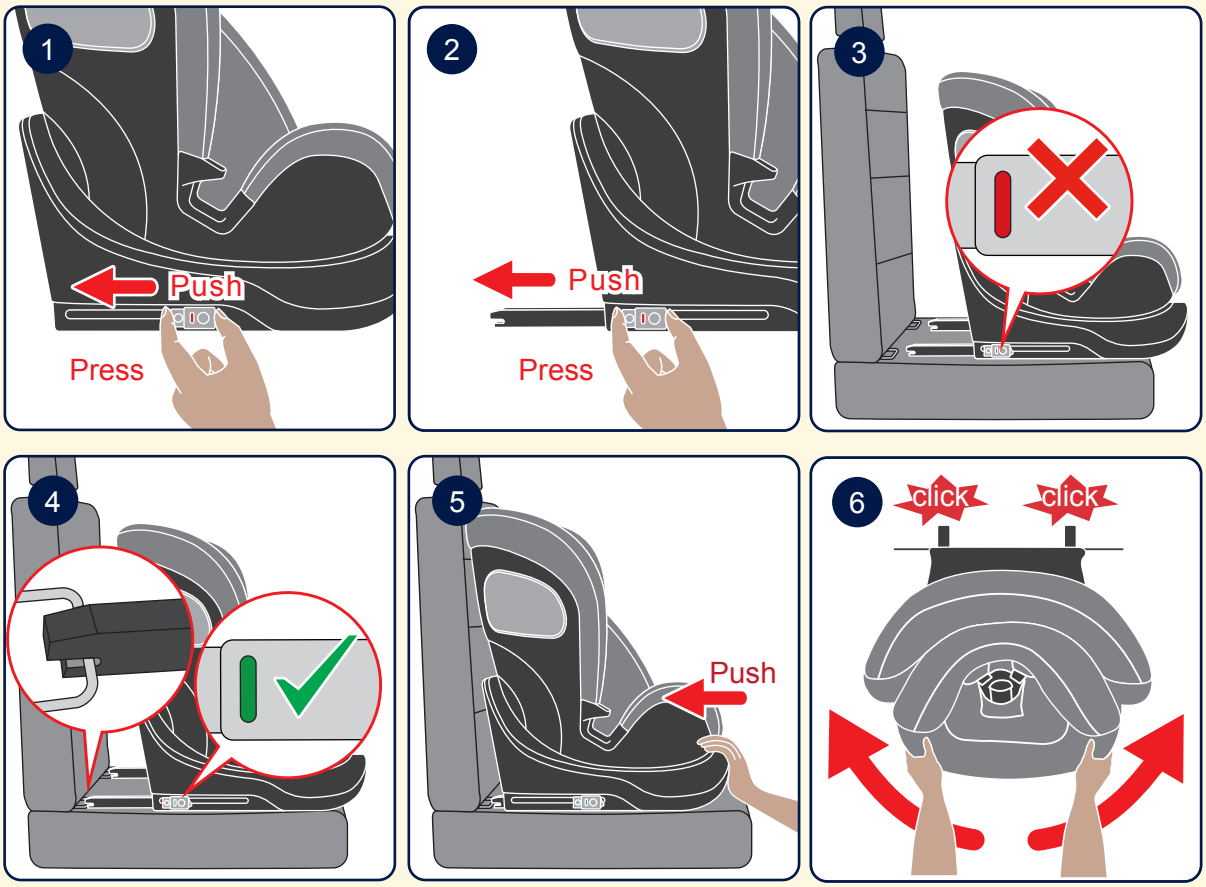



4. Support leg

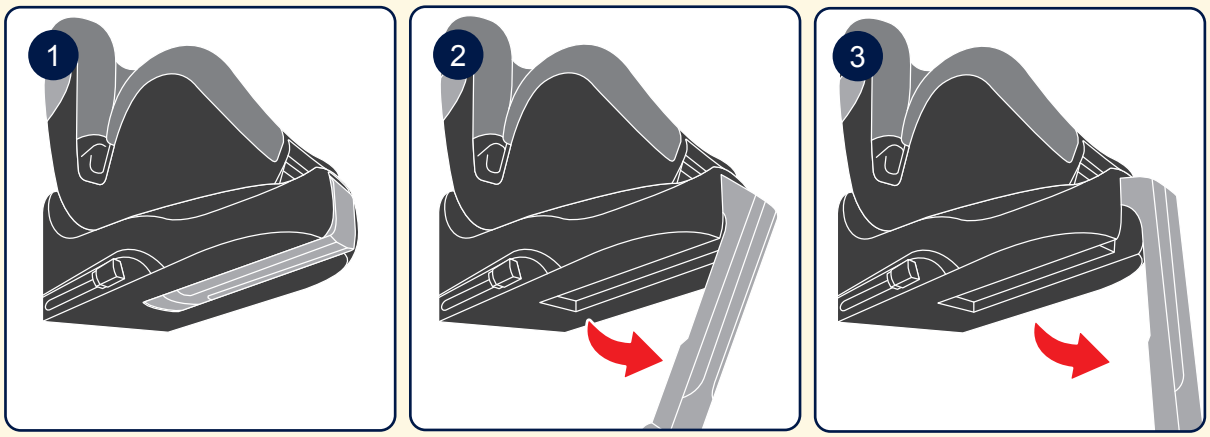


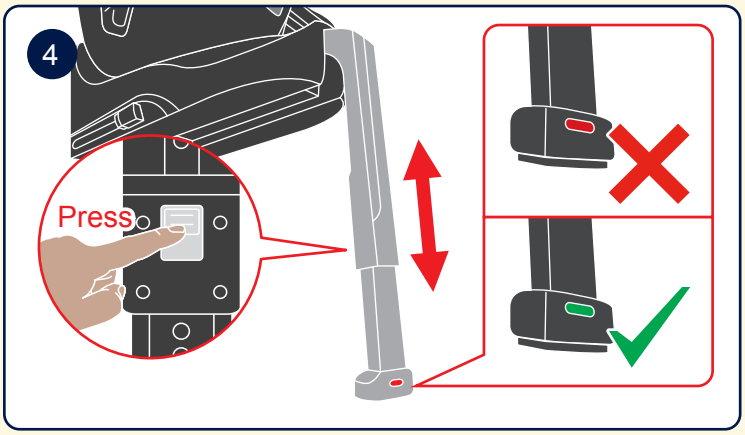


5. 5-point harness installation

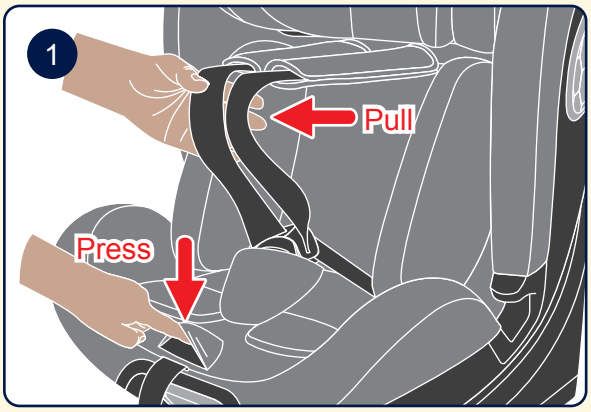


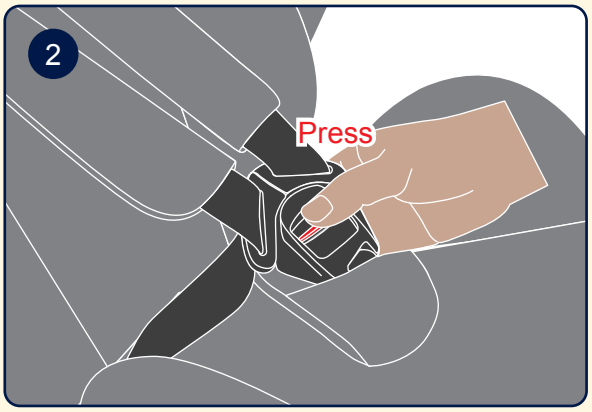


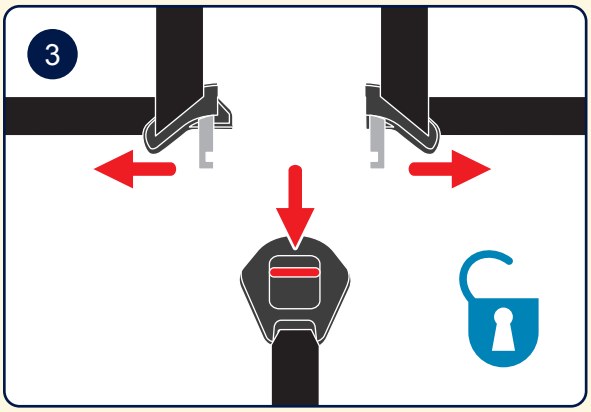


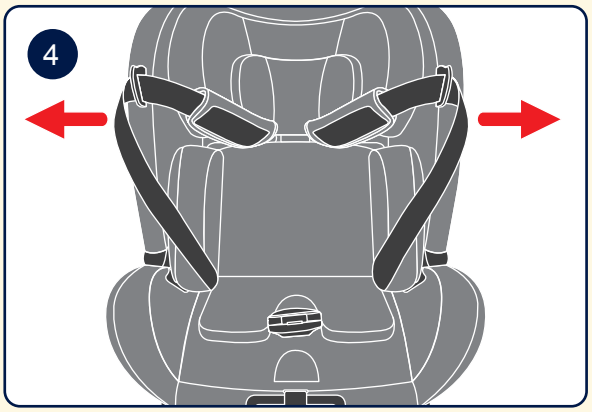




5

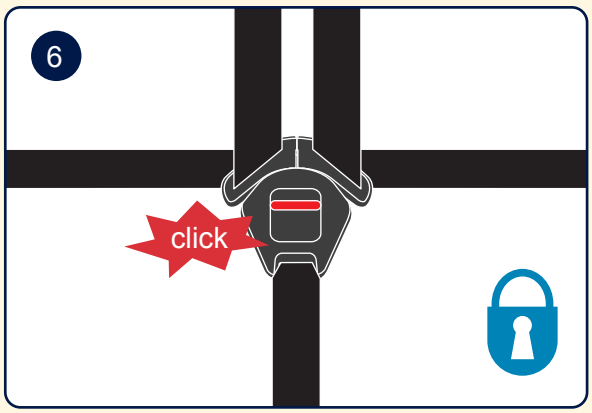
6
click

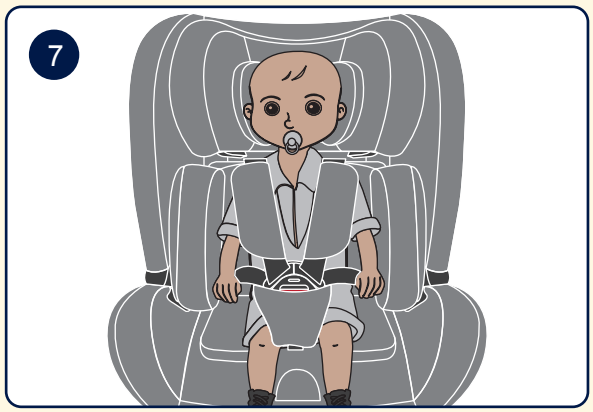

7

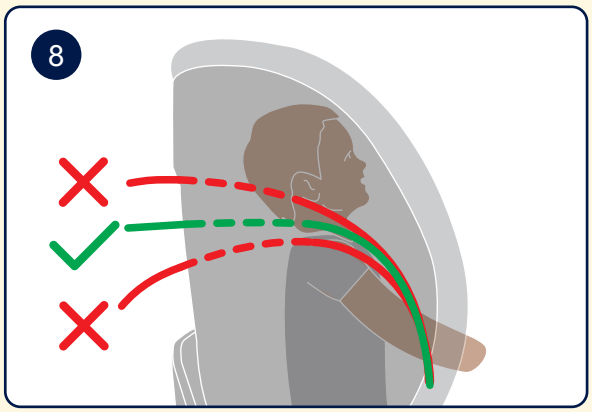

8

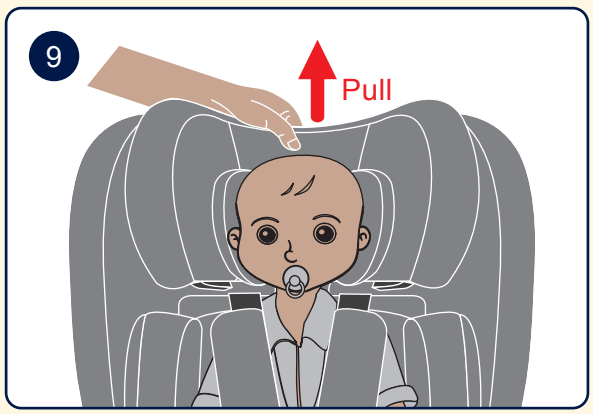

9
Pull

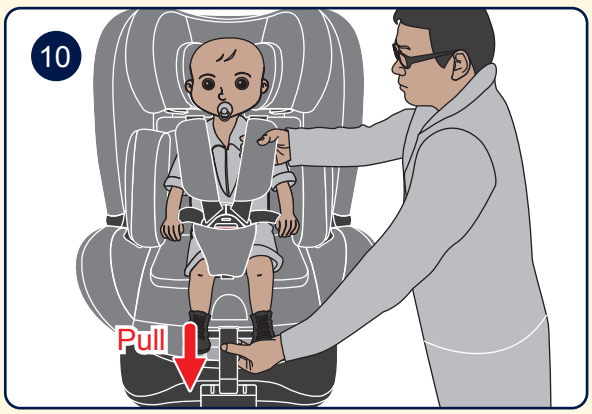

10
Pull


6. 5-point harness storage

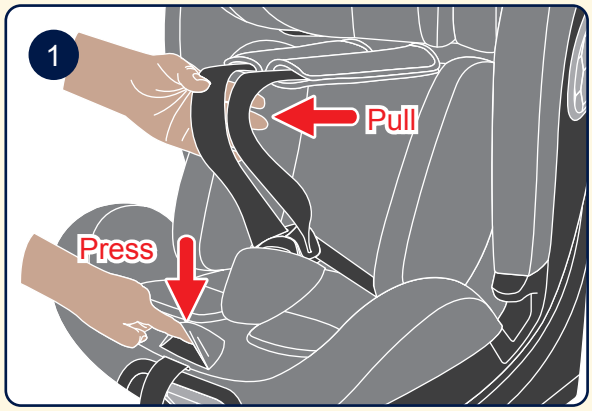


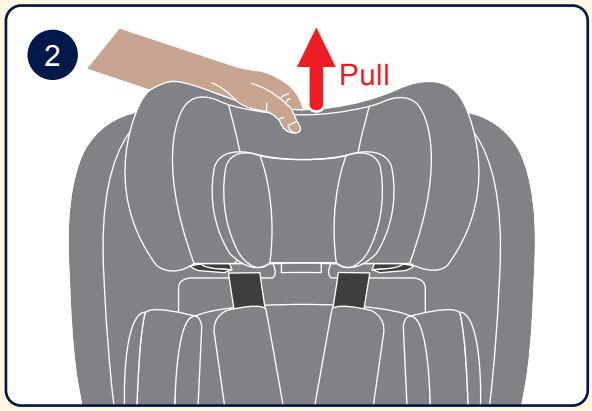


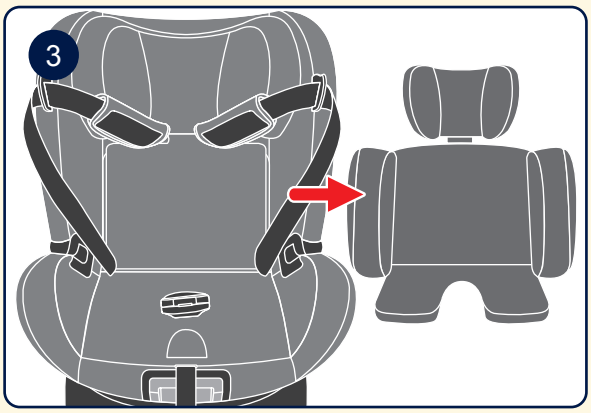


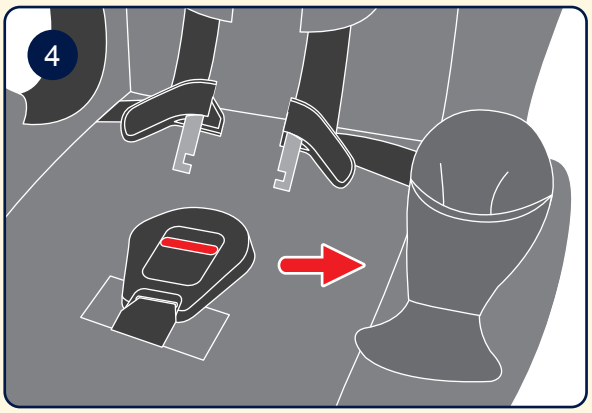


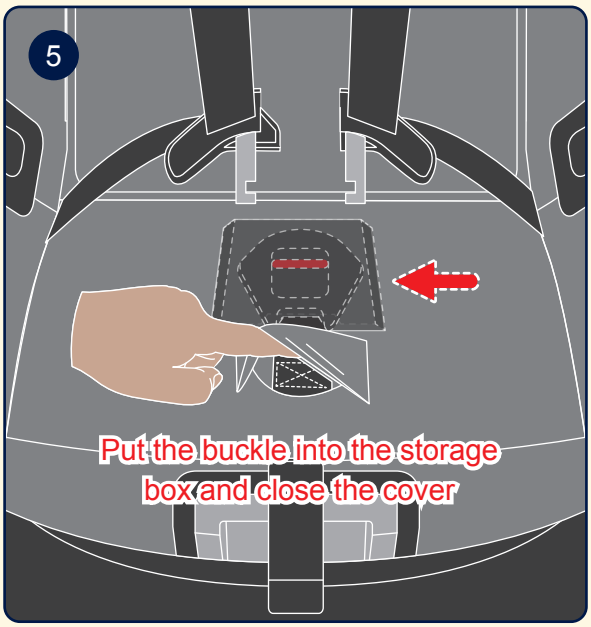


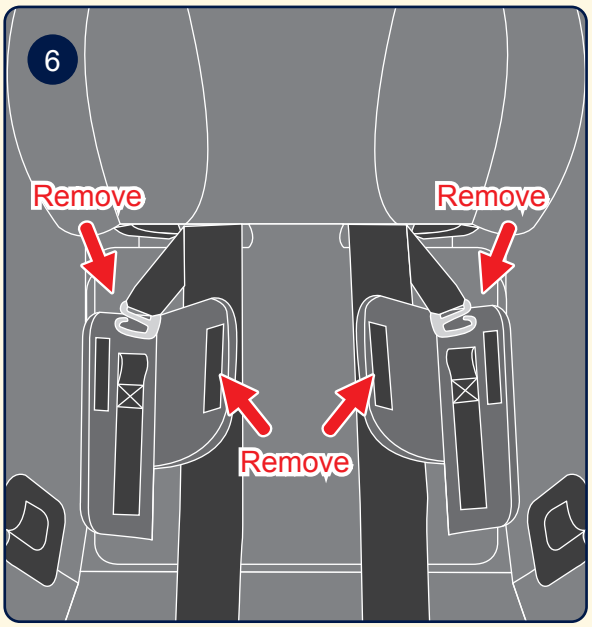

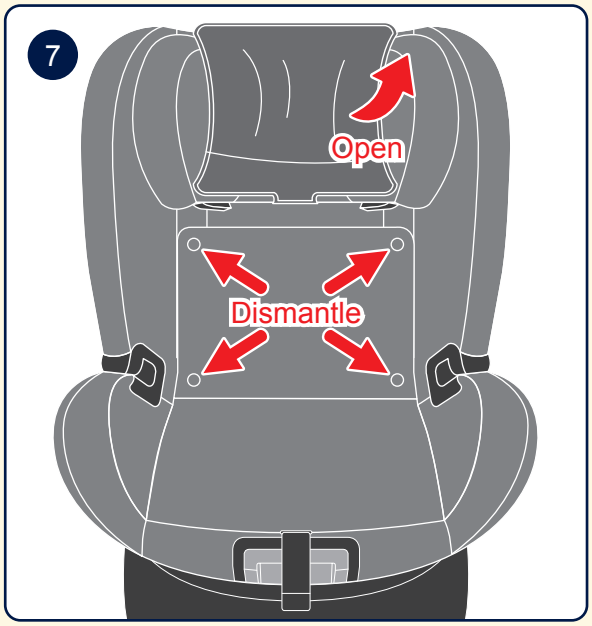
7
Open
Dismantle

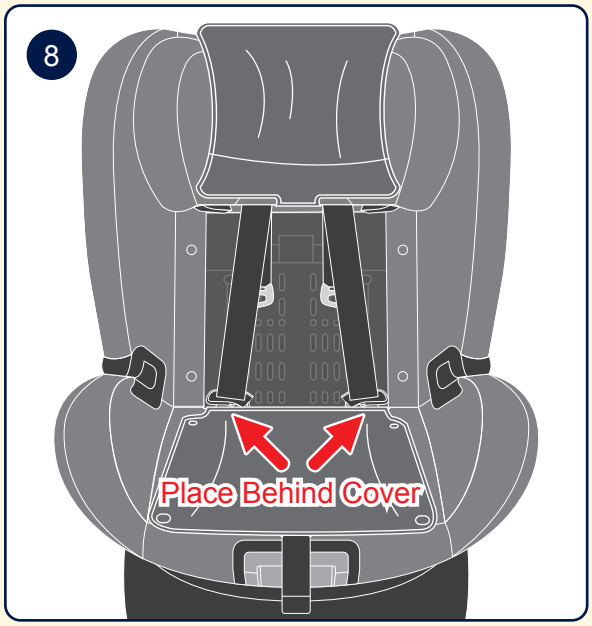
8
Place Behind Cover

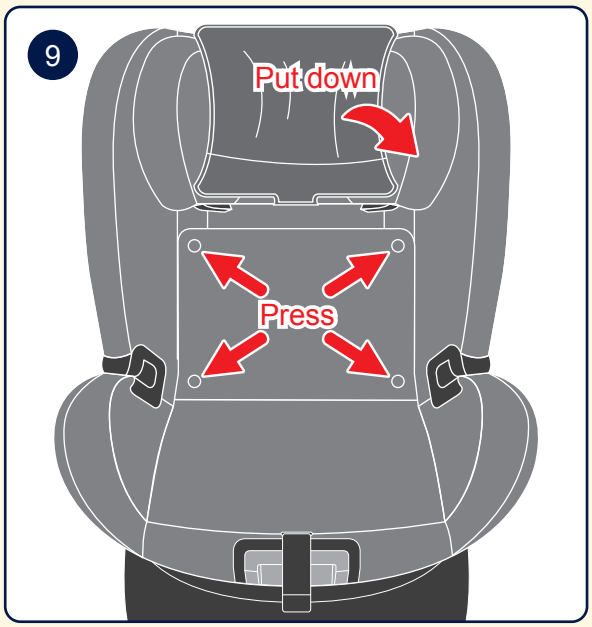
9
Put down
Press

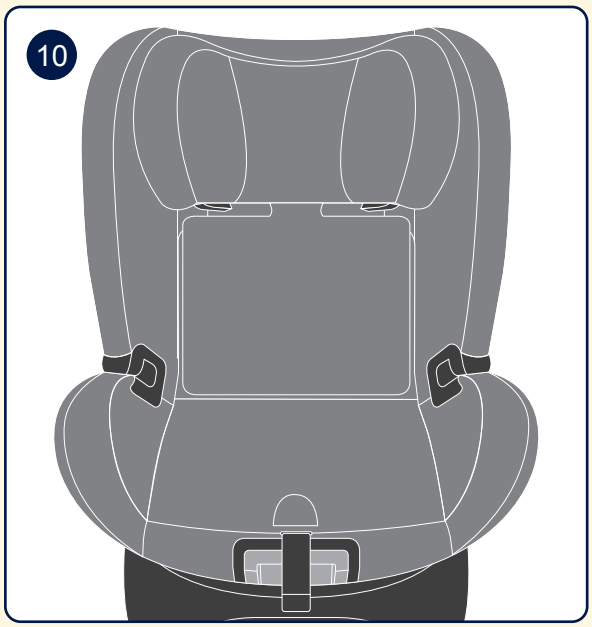
10


HEIGHT: 40-105cm（≤18kg）





ISO/R2

Attention

1. Only suitable for use in vehicles fitted with ISOFIX anchorages systems.
2. Must be installed rear-facing for children measuring 40-105 cm.
3. Never install on vehicle seats with active airbags.
4. Refer to page 7 for proper cushion use and configuration.

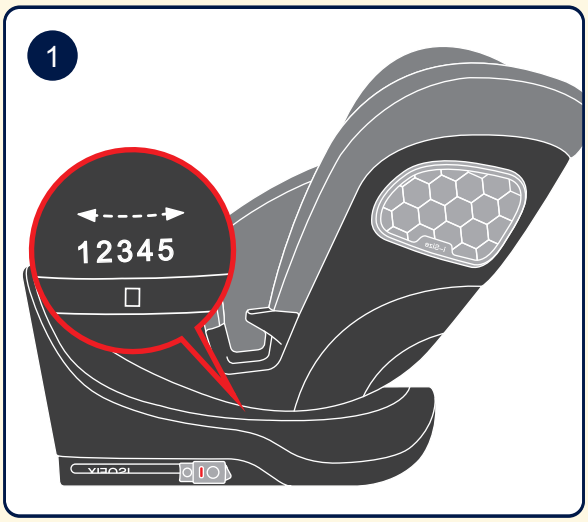

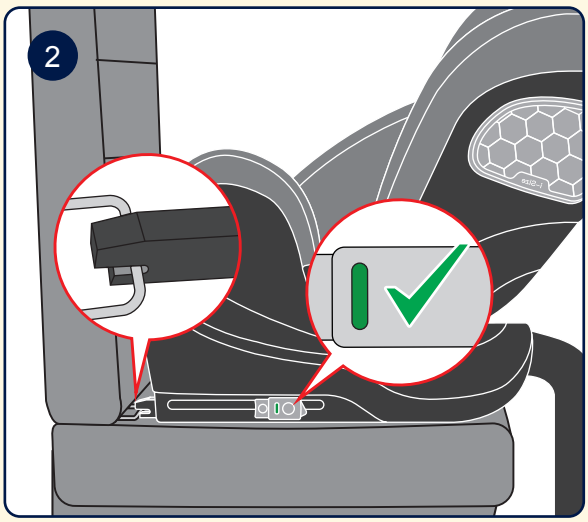

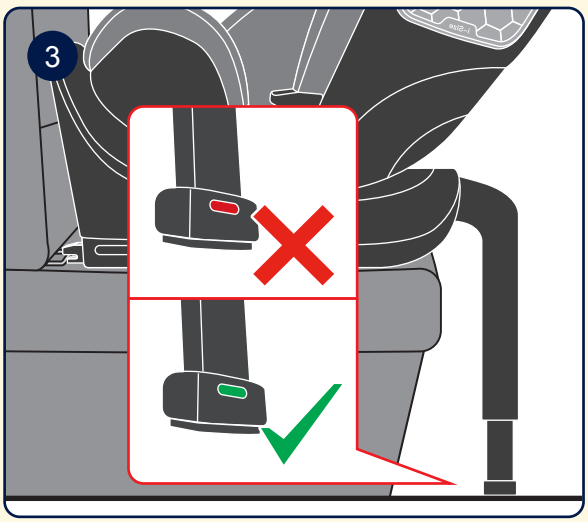


Installation Steps:

Adjust the safety seat to the proper position as illustrated in the diagram.

Secure the seat firmly to the vehicle.

For detailed operating instructions, refer to the seat functions section on pages 9-11.


HEIGHT: 76-105cm（≤18kg）

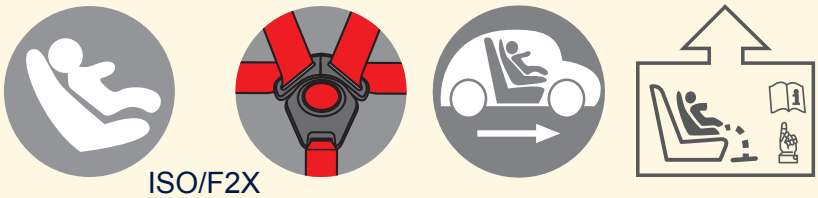



ISO/F2X

Attention

1. Only suitable for use in vehicles fitted with ISOFIX anchorages systems.
2. Must be installed forward facing for children measuring 76-105 cm.
3. Never install on vehicle seats with active airbags.

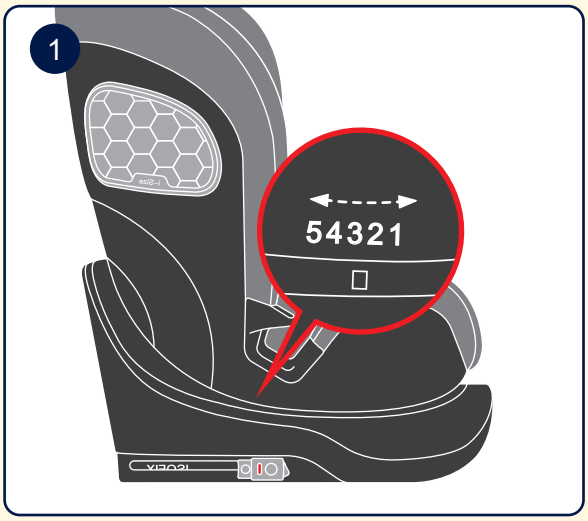

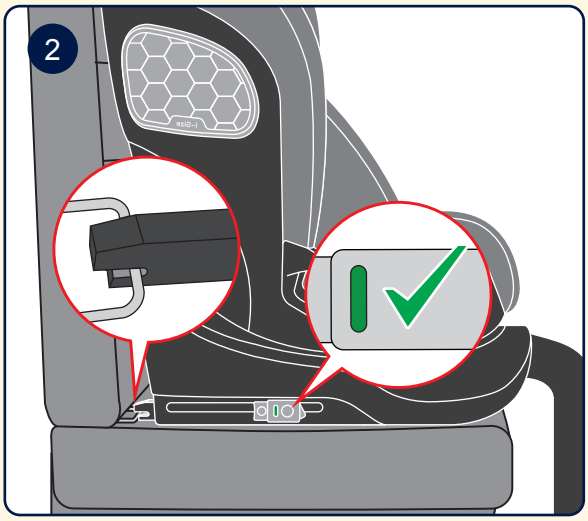

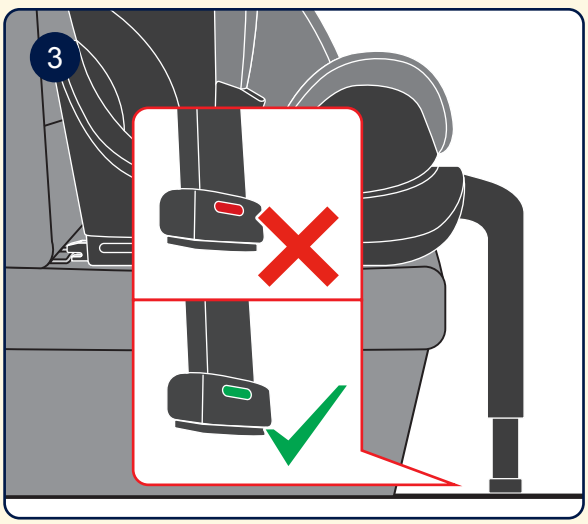

Installation Steps:

Adjust the safety seat to the proper position as illustrated in the diagram.


Secure the seat firmly to the vehicle.

For detailed operating instructions, refer to the seat functions section on pages 9-11.


Attention

1. Universal Installation is only suitable for vehicles fitted with 3-point belt and approved to ECE Regulation No.16.
2. There is only one position for height 100-150cm : Position 1 (Upright).
3. Must be installed in forward-facing orientation.


1. 3-point seat belt installation

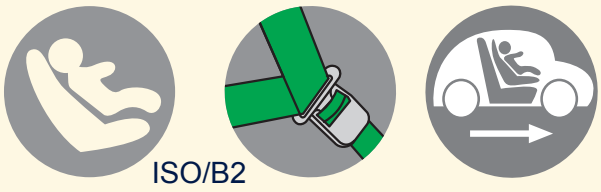

ISO/B2

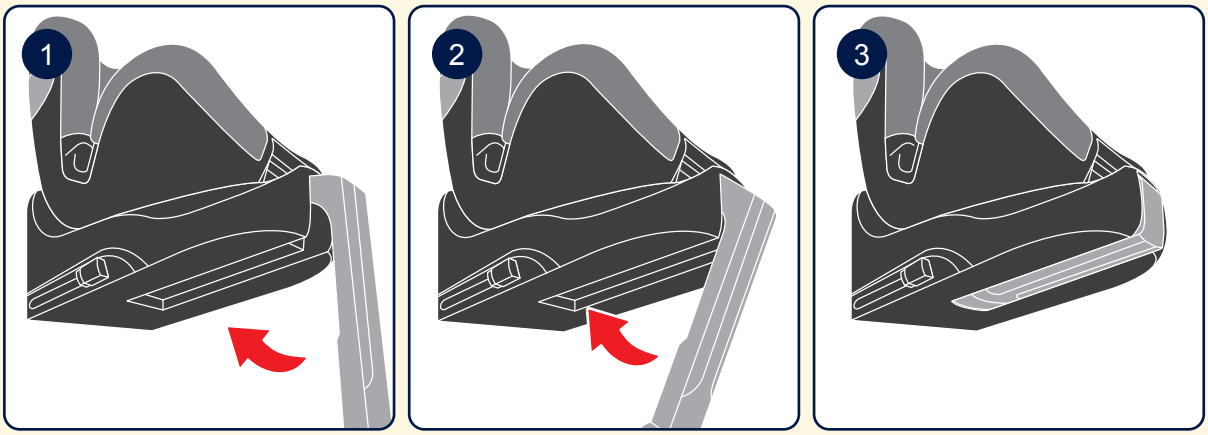


During the use of height 100-150 cm, the support leg should be stowed underneath the seat.

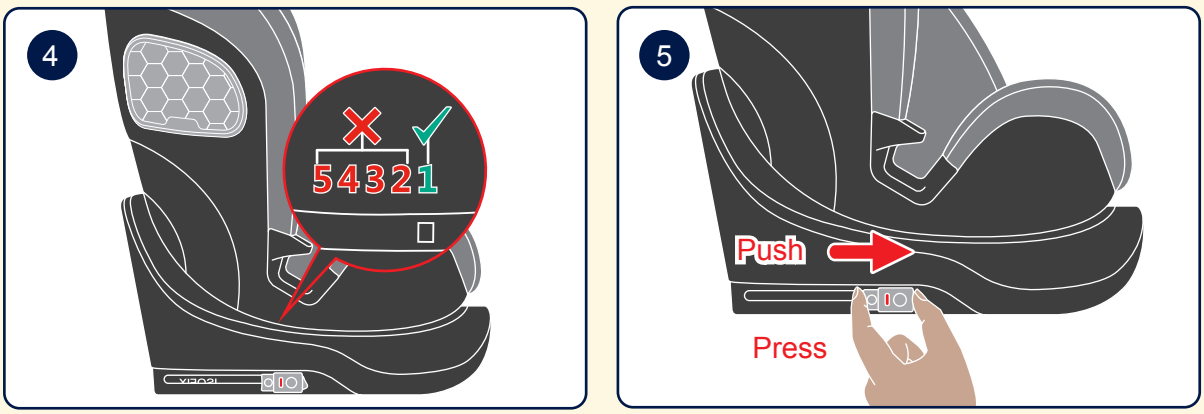


Adjust the seat position adjustment handle to position 1.

Ensure that the ISOFIX connector is retracted.

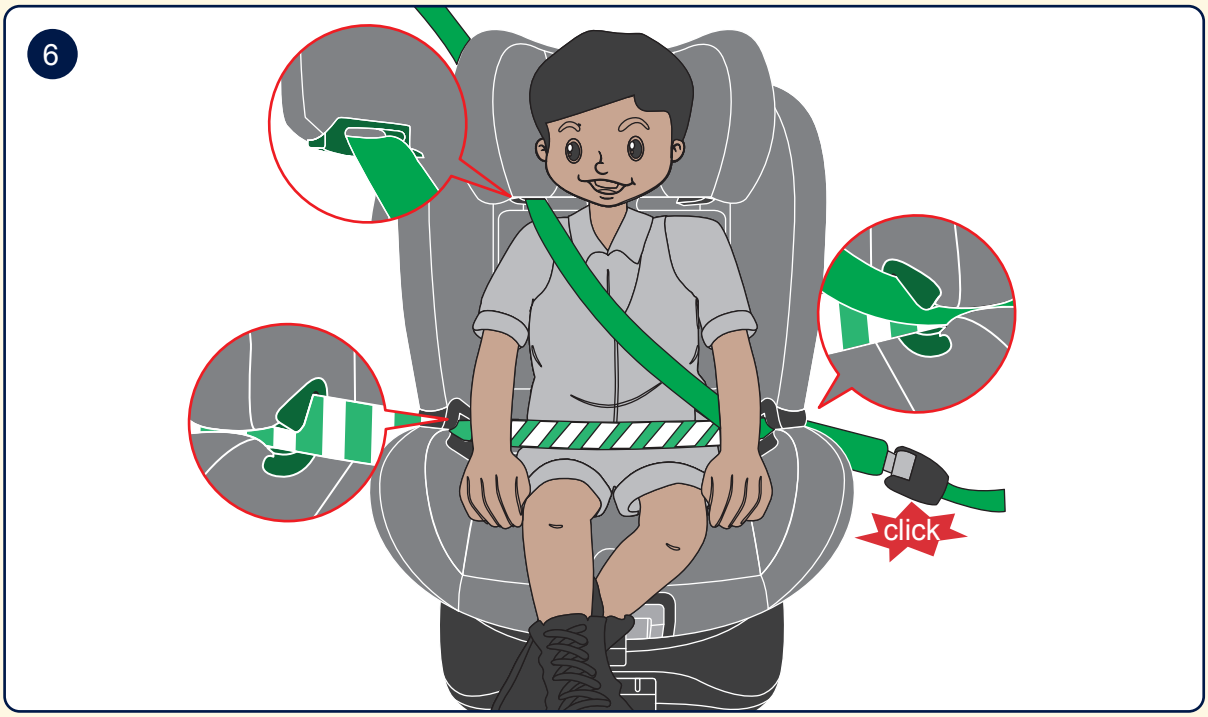


Place the safety seat and child on the car seat with the vehicle's 3-point seat belt .


2. ISOFIX attachment + 3-point belt installation

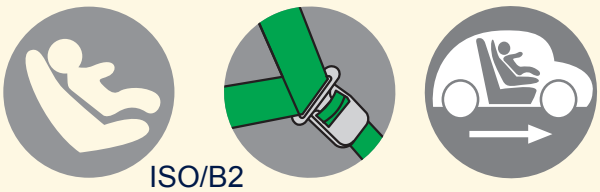


ISO/B2

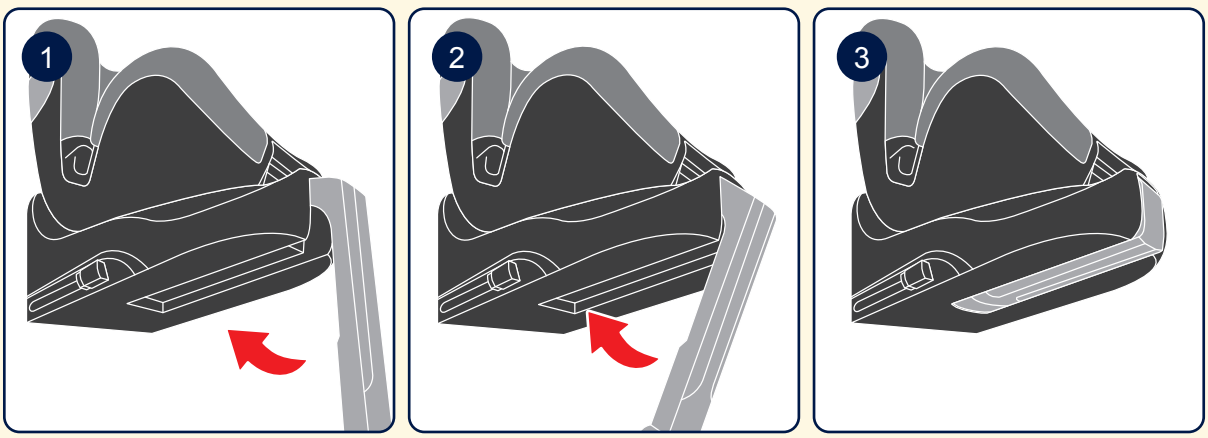


During the use of height 100-150 cm, the support leg should be stowed underneath the seat.

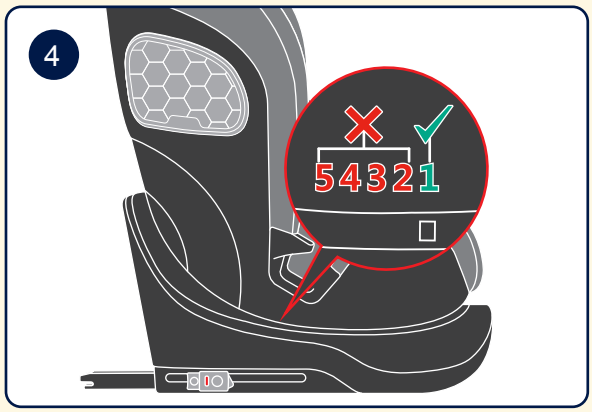

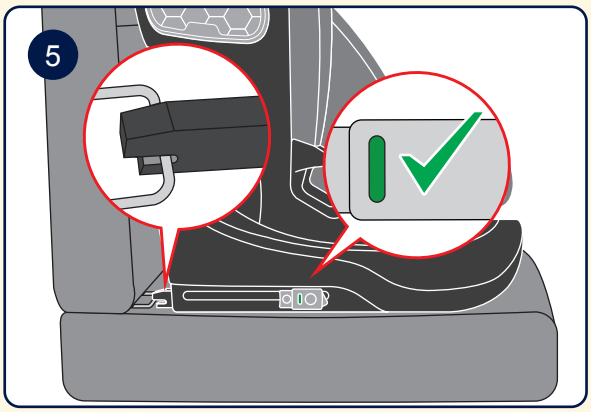



Adjust the seat position adjustment handle to position 1., then connect the ISOFIX connectors and push the safety seat towards the backrest to make it fit closely with the car seat.

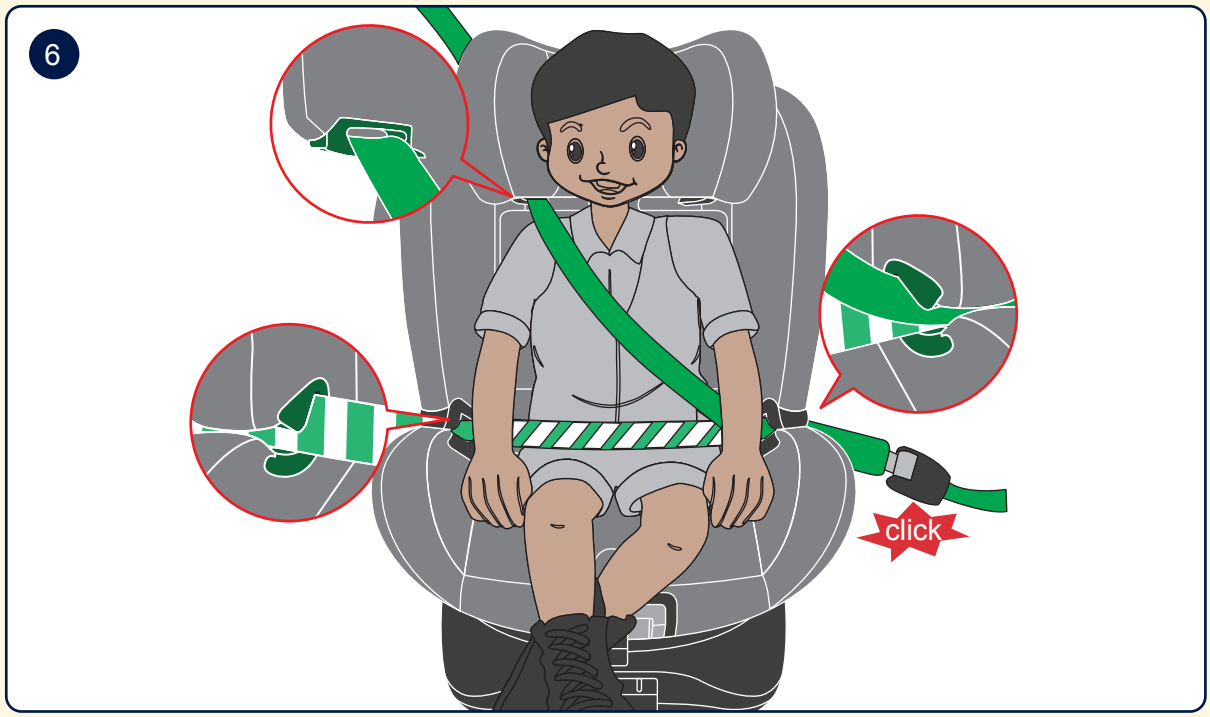

Place the safety seat and child on the car seat with the vehicle's 3-point seat belt .


1. Removing the headrest cover

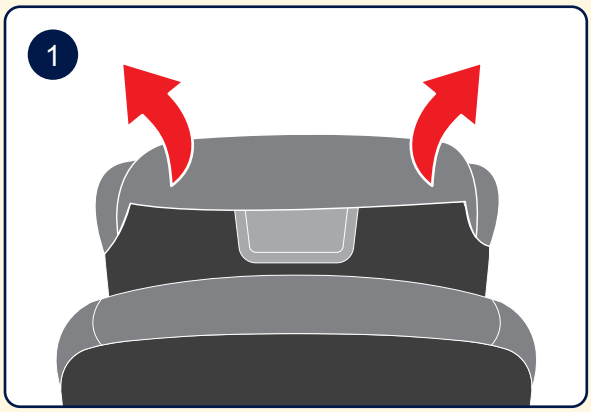


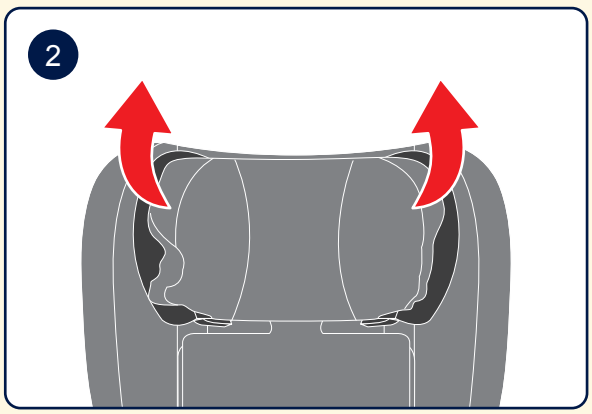

Release the buttons located at the back of the headrest.
Grasp the cloth cover on both sides of the headrest and pull upward to remove.

2. Removing the cover of the seat

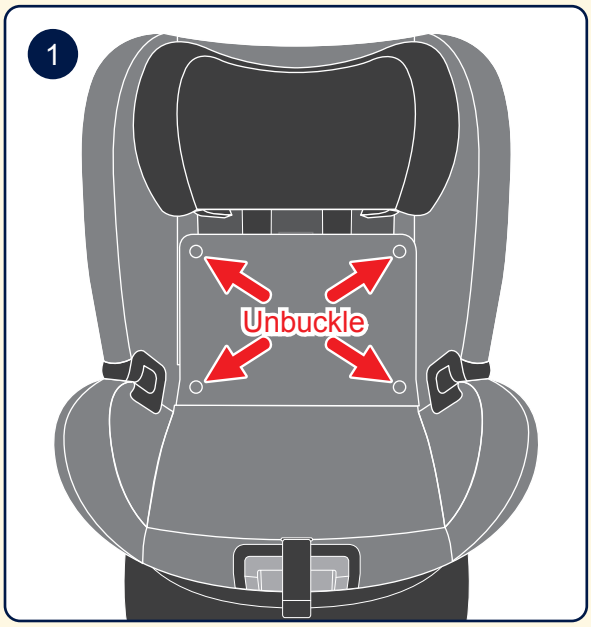

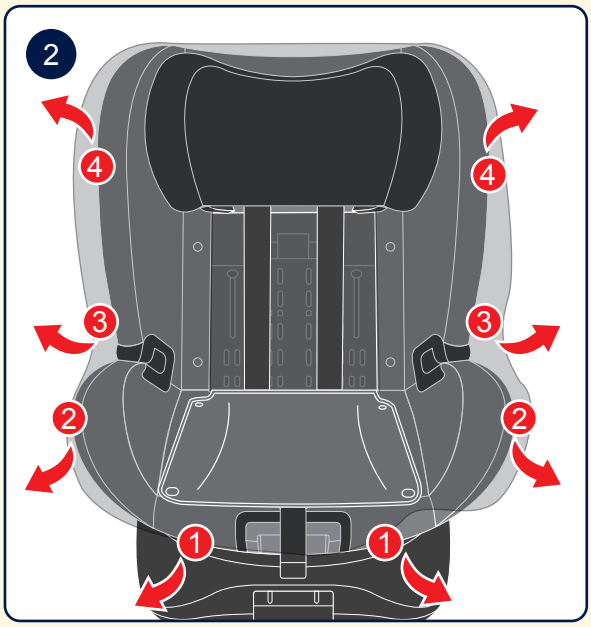

Begin by unfastening all four buttons on the car seat's backrest.
Starting from the bottom, carefully detach the fabric cover from each hook, working your way upward.

Attention Reverse the removal steps to reinstall all components.

Safety Inspection & Maintenance

Regular Safety Checks:

- Inspect all critical components regularly for damage
- Pay special attention to mechanical parts - ensure they function perfectly
- Replace the child safety seat immediately if:
  - It's been involved in an accident
  - Any damage is detected

Proper Storage:

- Store in a dry, safe location when not in use for extended periods
- Avoid areas with extreme temperatures or humidity

Cleaning Procedures:

- General Cleaning:
  - Use a soft-bristled brush to remove loose debris from belts and plastic parts
  - Allow components to air dry completely

- Stain Removal:
  - For food/beverage spills on belts:
  - Rinse thoroughly with warm water
  - Air dry completely before reuse

- Fabric Care:
  - Follow the care instructions when removing and washing covers
  - Note: Some color fading may occur during initial wash (normal)

Care Instructions


Do not use solvents, chemical cleaners and lubricants



Hand Wash
at below 30℃



Do not bleach

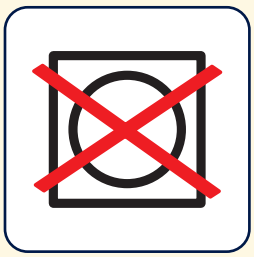

Do not
tumble dry



Do not iron

- The warranty period starts from the date of purchase and is valid for a period of 12 months.
- The warranty applies to material and manufacturing defects only.
- The date of purchase can only be determined with an original sales receipt.
- The warranty is only applicable to the original owner and is not transferable.
- The warranty is only applicable to products that have not been adapted by the user.
- In the case of any defects, the owner is required to return the product to the retailer. If the retailer cannot solve the problem, they must return the product, complete with a clear description of the complaint and the original sales receipt to the manufacturer. An exchange or return cannot be demanded.
- Repairs do not constitute an extension to the warranty term.
- The manufacturer is not liable for any damages other than those on products supplied.

- No warranty is given if:

- The product is not supplied to the manufacturer complete with the original sales receipt.
- Defects are caused by improper use or maintenance that is not in accordance with the instruction in this manual.
- Repairs are carried out by third parties.
- Defects are caused by neglect.
- Damage is determined.
- If there is normal wear and tear of the parts, belts and/or cover, which may be expected from everyday use.
- There is damage to the car upholstery.
- The stated warranty terms and conditions have not been satisfied.

Distributor details :

Unimark Distributors (Pty) Ltd.
P.O. Box 912-1095
Silverton
0127

Tel : +27 12 8041793

E-mail : info@safewaybabies.co.za
Web :www.safewaybabies.co.za